

# DSPAD

## ALPHA LITE LED Beauty Soft Light Data Sheet









### Fixture Information

Flat light source lighting fixture with excellent diffusivity, which is mainly used in broadcast studio. Installed on the newsroom or desk and used as a lighting for person. The LED source sets on the side(edge) with reflection and pattern optical technology applied. The LED source is not directly visible, no glare and extremely soft light distribution

- No fan and noiseless
- Excellent light quality, and average CRI 95~98 / R9, R12 are CRI 90 or higher
- 2,900~6,000K color temperature control function
- Built-in battery for easy installation and movement
- Can be used continuously for about 2 hours and 30 minutes without changing the brightness.

### Optional Accessories

 Bracket

 <b>UHD</b> Quality	 <b>CRI 95°</b>	 <b>TLCI 95°</b>	 Flicker Free	 Long LED Lifetime	 Side Reflection Lighting System	 Quite (No Fan)	 135° Wide Angle
Ultra HD Lighting Quality	High CRI True Color	High TLCI True Color					

# DSPAD




# DATA SHEET



## Specifications

LED Chip Type	0.5W 3030 PKG LED + Edge Reflector
Estimated LED Lifetime (hours)	50,000
White Light (K)	2,900-6,000 (VCT)
Color Rendition (%)	CRI 97 / TLCI 97
Dimming (%)	0-100 (16-bit)
Light Aperture Size (mm/inch)	215 x 65 / 8.5 x 2.5
Beam Angle (°)	135
Individual Control	Switch Jog Controller / OLED Display
Function	Dimming / CCT
Power Input Voltage	12.6V DC
Lighting Time (Battery)	2.5 hours
Power Consumption (W)	18
Ambient Temperature Operation (°C)	-20-45
Body Dimension (mm/inch) (WHD)	240 x 90 x 29 / 9.5 x 3.5 x 1.1
Body Weight (kg/lbs)	0.8 / 1.8
Protection Class	IP20

## Dimension

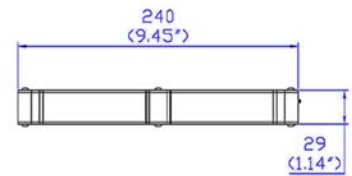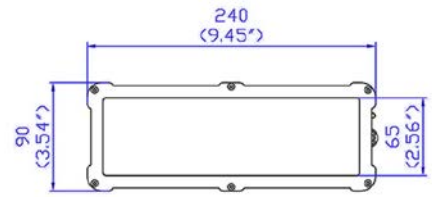

## Reference



WWW.ALPHA-LITE.NET

